




USB 3.0 Audio Converter

UAC-8

Operation Manual

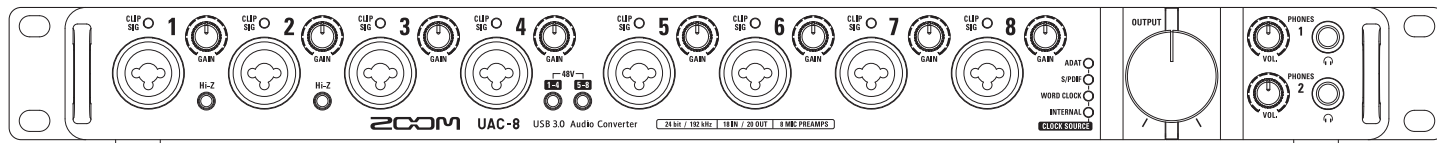

© 2015 ZOOM CORPORATION

Copying or reprinting this manual in part or in whole without permission is prohibited.

Contents

| | |
|---|----|
| Introduction | 02 |
| Usage and Safety Precautions | 03 |
| Names of Parts | 04 |
| Basic Connections..... | 06 |
| Installing the Driver | 07 |
| Turning the Power On and Off | 08 |
| Independent mic preamp function (standalone mode) | 10 |
| iPad connection (class compliant mode) | 11 |
| Setting Input and Output Devices..... | 12 |
| Playback | 13 |

| | |
|--|----|
| Recording..... | 14 |
| Using Digital Audio Equipment | 16 |
| ■ About Digital Audio Clock..... | 16 |
| ■ Connecting S/PDIF Devices | 16 |
| ■ Connecting ADAT Optical Devices..... | 18 |
| ■ Connecting the WORD CLOCK Connectors | 20 |
| ■ Connecting MIDI Devices..... | 22 |
| Restoring Factory Default Settings..... | 23 |
| Troubleshooting | 24 |
| Specifications | 25 |

Introduction

Thank you very much for purchasing a ZOOM **UAC-8** USB 3.0 Audio Converter.

The **UAC-8** has the following features.

18-in/20-out USB3.0 Audio Converter

The **UAC-8** is an audio converter with a SuperSpeed USB3.0 interface.

In addition to supporting Windows and Mac, using class compliant mode it can also be connected to an iPad. Since it also supports recording and playback at up to 24-bit/192kHz, it can also be used for the playback of high-resolution sound sources delivered with superior audio quality over the Internet.

Attention to audio performance

An asynchronous transfer system that is not impacted by computer jitter is used. The latest AD/DA converter, which supports 192 kHz, is used. So, the entire system reproduces the original audio faithfully.

Built-in high-performance mic preamps

The high-performance mic preamps are based on those developed for our H Series. Hi-Z input is supported. The gain can be raised by up to 60 dB, and +48V phantom power can be supplied.

Flexible built-in mixer and dedicated UAC-8 MixEfx mixer application

The **UAC-8** has a built-in mixer that allows you to freely route up to 20 output channels from among the 18 input channels and 20 computer playback channels. By using the **UAC-8 MixEfx** application designed for this interface, you can make settings for the built-in mixer and monitoring effects from a computer.



For details about **UAC-8 MixEfx**, see the ZOOM website (<http://www.zoom.co.jp/downloads/>).

Please read this manual carefully to fully understand the functions of the **UAC-8** so that you can make the most of it for many years. After reading this manual, please keep it with the warranty in a safe place.



Usage and Safety Precautions

Safety Precautions

In this operation manual, symbols are used to highlight warnings and cautions that you must read to prevent accidents. The meanings of these symbols are as follows.

| | |
|--|--|
|  | Something that could cause serious injury or death |
|  | Something that could cause injury or damage to the equipment |

Other symbols used

| | |
|--|------------------------------|
|  | An action that is mandatory |
|  | An action that is prohibited |

Warning

Alterations

- ⊘ Do not open the case or modify the product.

Operation using an AC adapter

- ❗ Never use any AC adapter other than a ZOOM AD-19.
- ❗ Always hold the AC adapter itself when disconnecting it from an outlet.

Caution

Product handling

- ❗ Do not drop, bump or apply excessive force to the unit.
- ❗ Be careful not to allow foreign objects or liquids to enter the unit.

Operating environment

- ⊘ Do not use in extremely high or low temperatures.
- ⊘ Do not use near heaters, stoves and other heat sources.
- ⊘ Do not use in very high humidity or where it could be splashed by water.
- ⊘ Do not use in places with frequent vibrations.
- ⊘ Do not use in places with much dust or sand.

Connection cables and input/output jacks

- ❗ Always turn the power OFF for all equipment before connecting any cables.
- ❗ Always disconnect all connection cables and the AC adapter before moving the unit.

Volume

- ⊘ Do not use at a loud volume for a long time.

Usage Precautions

Interference with other electrical equipment

In consideration of safety, the **UAC-8** has been designed to minimize its

emission of electromagnetic waves and to suppress interference from external electromagnetic waves. However, equipment that is very susceptible to interference or that emits powerful electromagnetic waves could result in interference if placed nearby. If this occurs, place the **UAC-8** and the other device farther apart.

With any type of electronic device that uses digital control, including the **UAC-8**, electromagnetic interference could cause malfunction, corrupt or destroy data and result in other unexpected trouble. Always use caution.

Rack mounting

If you are unable to mount the **UAC-8** in the rack you are using, remove the rubber feet from its bottom panel.

Cleaning

Use a soft cloth to clean the exterior of the unit if it becomes dirty. If necessary, use a damp cloth that has been wrung out well to wipe it. Never use abrasive cleansers, wax or solvents such as alcohol, benzene or paint thinner.

Temperature considerations

Continuous use of this interface for long periods of time, for example, might cause it to become warm. This is normal as long as it does not become too hot to touch.

Breakdown and malfunction

If the **UAC-8** should malfunction or operate abnormally, disconnect

it immediately. Contact the store where you bought the unit or ZOOM service with the following information: product model, serial number and specific symptoms of breakdown or malfunction, along with your name, address and telephone number.

Copyrights

- Windows® is a registered trademark of Microsoft® Corporation.
- Mac®, iPad® and Lightning™ are trademarks or registered trademarks of Apple Inc.
- ADAT and ADAT Optical are trademarks of inMusic Brands Inc. in the US and other countries.
- MIDI is a registered trademark of Association of Musical Electronics Industry (AMEI).
- Other product names, registered trademarks and company names in this document are the property of their respective companies.

Note: All trademarks and registered trademarks in this document are for identification purposes only and are not intended to infringe on the copyrights of their respective owners.

Recording for any purpose other than personal use from copyrighted sources, including CDs, records, tapes, live performances, video works and broadcasts, without permission of the copyright holder is prohibited by law. Zoom Corporation will not assume any responsibility related to infringements of copyrights.

Names of Parts

■ Front Panel

Level indicators

The LED lights red when the signal clips.

Input gain knobs

Use to adjust the input gain of the mic preamp.

INPUT jacks

These analog signal input jacks have mic preamps. You can connect mics, keyboards and guitars to them. These can be used with both XLR and 1/4-inch (balanced or unbalanced) phone plugs.


Power indicator

This lights when the **UAC-8** is turned on.

PHONES 1 and 2 volume knobs

Use these to adjust the headphone volumes of the PHONES 1 and 2 jacks.

Inputs 1 to 8

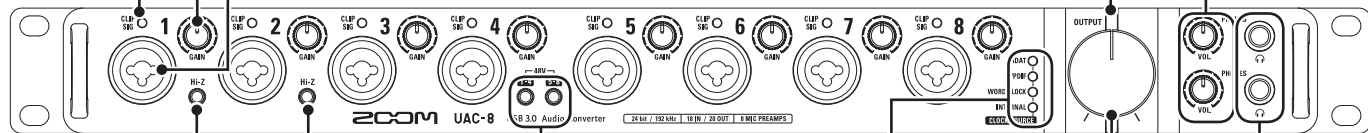

Hi-Z switches

Use to switch the input impedances of inputs 1 and 2. Turn them on when connecting a guitar or bass guitar.

PHANTOM switches

Set these to on to supply phantom power to inputs 1-4 and 5-8.

CLOCK SOURCE indicators

These show the clock source that is being used: ADAT, S/PDIF, WORD CLOCK or INTERNAL.


MAIN OUTPUT level knob

Use to adjust the volume of the audio signal output from the MAIN OUTPUT jacks.


PHONES 1 and 2 jacks

Connect headphones to these.

XLR



TRS



Standalone mode (→P. 10)

The **UAC-8** will function as an eight-channel mic preamp and digital input/output device in standalone mode if its power is turned on when it is not connected to a computer.

When used in standalone mode, operation is set in advance using the **UAC-8 MixEfx** mixer application.

■ Rear Panel

POWER switch
Turns the **UAC-8**
ON/OFF

DC 12V AC adapter connector
Connect the included
AC adapter here.

MIDI IN/OUT jacks
Connect a MIDI keyboard or
MIDI controller to the MIDI IN
jack.
Connected MIDI sound module
or other device to the MIDI
OUT jack.

ADAT OPTICAL IN/OUT jacks
Connect optical cables that comply with
the ADAT Optical standard.
These can send and receive digital audio
signals in ADAT, SMUX and SMUX4
formats.

USB 3.0 port
Connect a computer or
iPad here.

**CLASS
COMPLIANT
MODE switch**
Use to turn Class
Compliant Mode
ON/OFF.
Use when
connecting an iPad.
(→P. 11)

S/PDIF IN/OUT jacks
Connect coaxial cables
that comply with the S/
PDIF standard.
Two channels of digital
audio signals in S/PDIF
format can be sent and
received at resolutions up
to 24-bit/192kHz .

**WORD CLOCK
IN/OUT connectors**
Use these to send and
receive word clock
signals between the
UAC-8 and other
devices.

MAIN OUTPUT jacks
Connect speakers with built-
in amplifiers or an amplifier
and speaker system.
These support balanced
output with 1/4-inch phone
plugs.

LINE OUTPUT jacks
Connect monitors for
multichannel monitoring or
external effects.
These support balanced
output with 1/4-inch phone
plugs.

NOTE

When shipped new from the factory, the AD/DA converter upsampling function is enabled. This will cause operation with a 4x sampling rate when the sampling rate is 44.1/48 kHz. See the **UAC-8 MixEfx** Reference Guide to disable it.

Sampling rates and inputs/outputs


| Sampling rate | Analog inputs/ outputs | S/PDIF inputs/ outputs | ADAT inputs/ outputs | Total inputs/ outputs |
|-----------------|---------------------------|---------------------------|-------------------------|--------------------------|
| 44.1 or 48kHz | 8/10 | 2/2 | 8/8 | 18/20 |
| 88,2 or 96kHz | 8/10 | 2/2 | 4/4 | 14/16 |
| 176.4 or 192kHz | 8/10 | 2/2 | 2/2 | 12/14 |

*Except when in Class Compliant Mode. (→ P. 11)

Upsampling

When the original sampling rate is 44.1 kHz or 48 kHz, internal processing can allow operation at 176.4 kHz or 192 kHz (enabled when shipped new from the factory). This eliminates aliasing noise from the sound during A/D conversion and makes the sound with D/A conversion even clearer than before.

Basic Connections

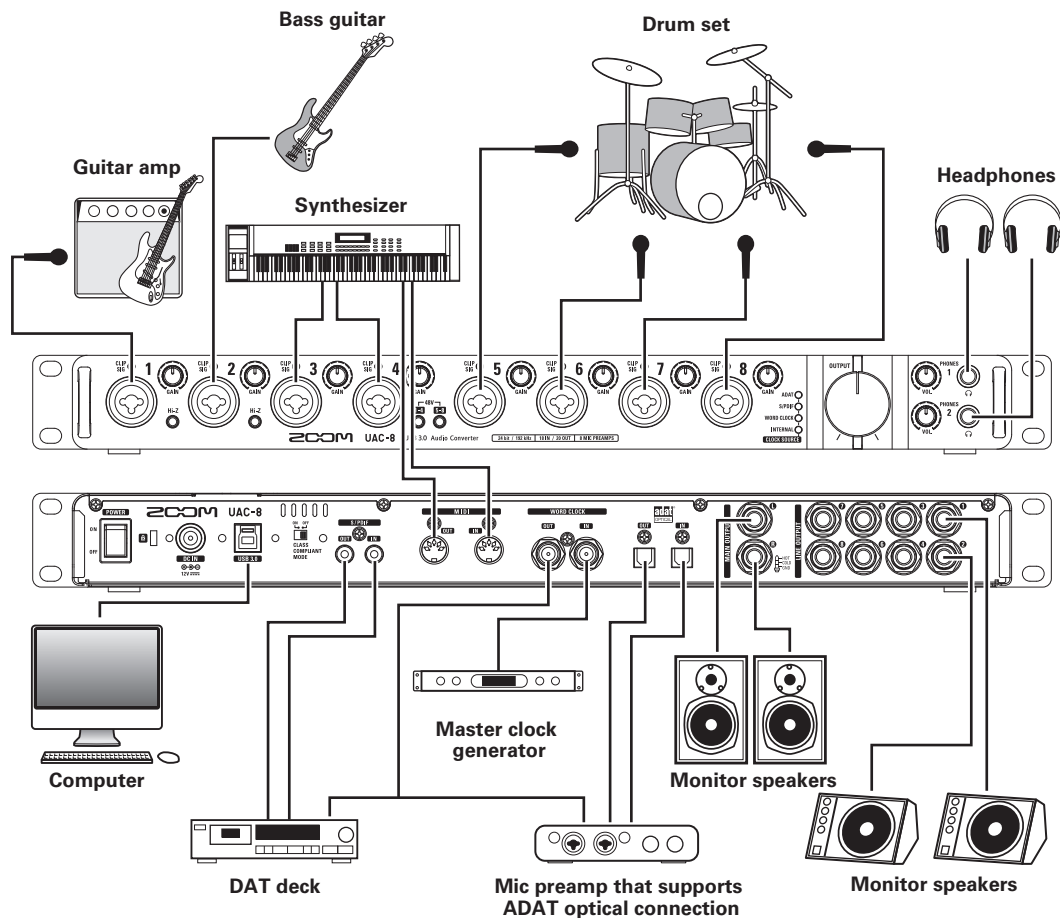

Installing the Driver

NOTE

Do not connect the **UAC-8** until installation completes.

1. Download the "ZOOM UAC-8 Driver" from <http://www.zoom.co.jp/downloads/> to the computer.

NOTE

- You can download the latest "ZOOM UAC-8 Driver" from the above website.
- Download the driver for the operating system that you are using.

2. Launch the installer and install the driver.

Follow the instructions that appear on screen to install the ZOOM UAC-8 Driver.

NOTE


- See the Installation Guide included in the driver package for detailed installation procedures.

Turning the Power On and Off


■Turning the Power On

1. Minimize the volume of output devices connected to the **UAC-8**.

2. Plug the AD-19 adapter designed for this unit into an outlet.




3. Set  to OFF.



NOTE

Connection to a computer is not possible when the CLASS COMPLIANT MODE switch is set to ON.


4. Use a USB cable to connect the **UAC-8** and the computer.

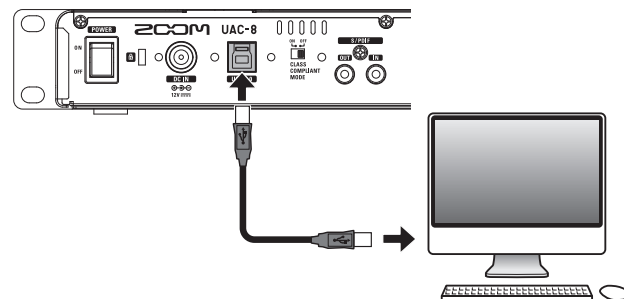

NOTE

Although also compatible with USB 2.0, connection using USB 3.0 enables operation with even higher performance.


5. Set  to ON.



NOTE

If the driver is not installed on the connected computer, the **UAC-8** will not be recognized. (→P.7)


6. Confirm that the power indicator is lit.



NOTE

UAC-8 startup and connection with the computer takes time, and the power indicator might blink longer sometimes. If it continues to blink even after waiting some time, try turning the power off and on again.


■ **Turning the Power Off**

1. Minimize the volume of devices connected to the **UAC-8**.
.....
2. Turn off connected amps and monitor speakers, for example.
.....
3. Set  to OFF.


Independent mic preamp function (standalone mode)

1. Minimize the volume of output devices connected to the **UAC-8**.

2. Plug the AD-19 adapter designed for this unit into an outlet.



3. Disconnect the USB cable.

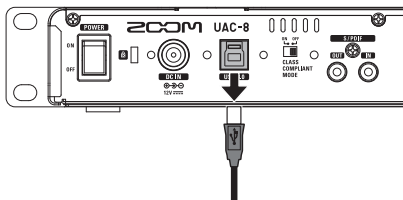


NOTE

The **UAC-8** detects the USB connection status and switches the mode automatically as follows.


- When connected to a computer:
→ The **UAC-8** will function as an audio interface. (→ P.08)
- When not connected to a computer:
→ The **UAC-8** will function in standalone mode.

4. Set  to ON

In standalone mode, the unit operates by itself according to the settings made in **UAC-8 MixEfx**.



5. Confirm that the power indicator is lit.




HINT

In standalone mode, the power will automatically turn off after 10 hours. If you want the power to always stay on, set the **UAC-8 MixEfx** power management function to OFF (refer to the software reference guide).


iPad connection (class compliant mode)

1. Minimize the volume of output devices connected to the **UAC-8**.

2. Plug the AD-19 adapter designed for this unit into an outlet.




3. Set  to ON.




NOTE

- Connection to an iPad is not possible when the CLASS COMPLIANT MODE switch is set to OFF.
- Turn the power OFF before changing the CLASS COMPLIANT MODE switch setting. If the power is already ON, changing the CLASS COMPLIANT MODE switch will have no effect.


4. Connect the **UAC-8** and the iPad using an Apple iPad Camera Connection Kit or Lightning to USB Camera Adapter.

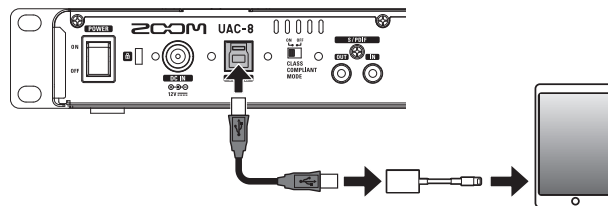

5. Set  to ON.



6. Confirm that the power indicator is lit.



NOTE

When in Class Compliant Mode, the 8 ANALOG input and 10 ANALOG output channels are available.

Setting Input and Output Devices

NOTE

Settings must be made in DAW software to use the **UAC-8** with it for recording and playback.

1. Select the **UAC-8** as the computer sound device.

NOTE

- See the Installation Guide included in the driver package for procedures to set the sound device in different operating systems.

2. Select the **UAC-8** as the audio input and output device in the DAW software.

The **UAC-8** inputs correspond to the ports as follows.

NOTE

You can use **UAC-8 MixEfx** to route output signals to output jacks freely.

For details, see the **UAC-8 MixEfx** Reference Guide.

HINT

See the owner's manual for the DAW software that you are using for instructions about how to set the input and output devices.


Input device


| Device name | Port name | Corresponding input |
|-------------|-----------|---------------------|
| ZOOM UAC-8 | 1 | INPUT1 |
| | 2 | INPUT2 |
| | 3 | INPUT3 |
| | 4 | INPUT4 |
| | 5 | INPUT5 |
| | 6 | INPUT6 |
| | 7 | INPUT7 |
| | 8 | INPUT8 |
| | 9 | S/PDIF L |
| | 10 | S/PDIF R |
| | 11 | ADAT1 |
| | 12 | ADAT2 |
| | 13 | ADAT3 |
| | 14 | ADAT4 |
| | 15 | ADAT5 |
| | 16 | ADAT6 |
| | 17 | ADAT7 |
| | 18 | ADAT8 |


Adjusting Headphone and Speaker Volume

■ Adjusting Headphone Volume

1. Connect headphones to PHONES 1 or PHONES 2.

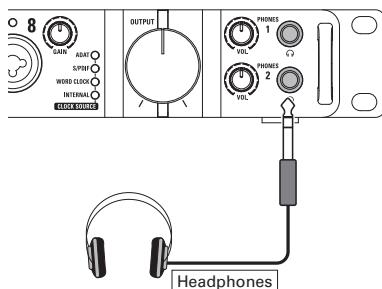

2. Turn the  for PHONES 1 or PHONES 2 to adjust the headphone volume.





NOTE


- The same signals are output from PHONES 1 as the MAIN OUTPUT jacks.
- For PHONES 2, you can use **UAC-8 MixEfx** to set the output signal to MAIN OUTPUT or LINE OUTPUT 1/2, 3/4, 5/6 or 7/8. By default, the same signals are output as the MAIN OUTPUT jacks. For details, see the **UAC-8 MixEfx** Reference Guide.

■ Adjusting Speaker Volume

1. Connect monitor speakers to the MAIN OUTPUT jacks.

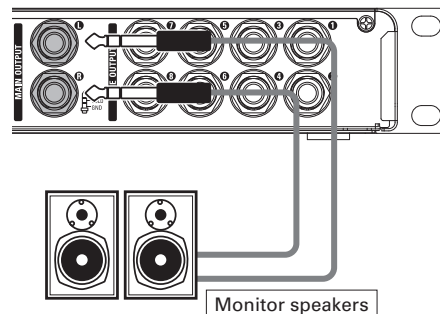

2. Turn the  to adjust the speaker volume.




NOTE

The OUTPUT volume only affects the MAIN OUTPUT. Use **UAC-8 MixEfx** to adjust other output volumes. For details, see the **UAC-8 MixEfx** Reference Guide.

Using Instruments and Mics

■ Connecting Instruments


Connect instruments to INPUTS 1 to 8 using TRS/mono phone cables.

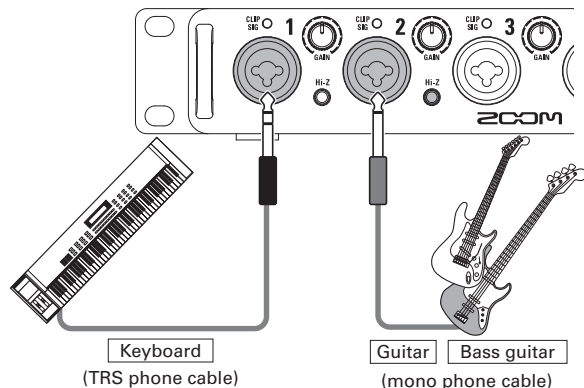

NOTE


Using the Hi-Z function

- When using a passive guitar or bass guitar, connect it to INPUT 1 or 2, and push that input's **Hi-Z** button so that it lights.
- When connecting a keyboard or other instrument to INPUT 1 or 2, press its **Hi-Z** button so that it becomes unlit.



■ Connecting Mics



Using XLR cables, connect mics to INPUTS 1 to 8.

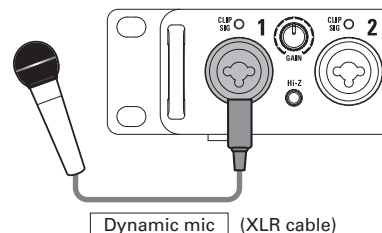

NOTE


Using Phantom Power

- To use a condenser mic, press **48V** for the connected INPUT so that it lights. Phantom power is supplied when this switch is lit.
- When the corresponding switch is lit, phantom power is supplied to INPUTS 1–4 or INPUTS 5–8 at the same time.
- To use dynamic mics and condenser mics at the same time, consider the use of phantom power when connecting them to the inputs.

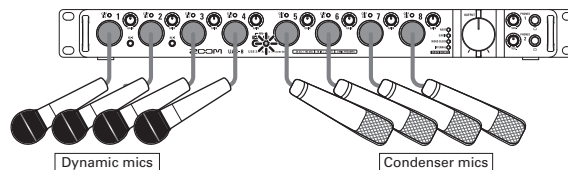


■ Adjusting the Input Gain


You can adjust the gain of each INPUT.


1. Check **CLIP SIG**  to see the status of an input signal.

Lit green: Input signal present.

Lit red: Input signal is clipping.



2. Turn  to adjust the input gain.



HINT


Set it so that the level indicator does not light red.

Using Digital Audio Equipment

■ About Digital Audio Clock

When the **UAC-8** is connected to other digital audio equipment, audio clock must be synchronized in order to transfer audio data between them. If they are not synchronized, noise and various other problems will occur.

To synchronize audio clock, one device must operate as the master, which sets the reference clock, and the other must operate as a slave.

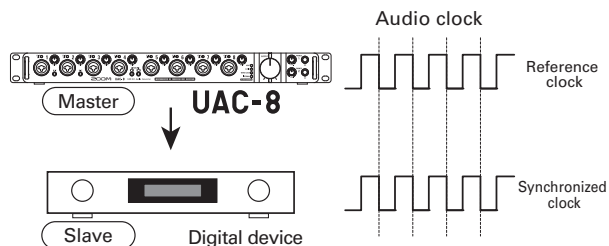

The **UAC-8** is operating as the master, and the audio clock of the **UAC-8** and the other digital device are synchronized.

■ Connecting S/PDIF Devices

1. Minimize the volume of output devices connected to the **UAC-8**.

HINT

When connected, noise might occur until clock synchronizes.

2. Set the same sampling rates for the **UAC-8** and the connected device.

NOTE

For instructions about how to change the sampling rate of the **UAC-8**, see the **UAC-8 MixEfx** Reference Guide.


► Inputting an S/PDIF signal to the UAC-8

3. Use **UAC-8 MixEfx** to set CLOCK SOURCE to S/PDIF.


The S/PDIF CLOCK SOURCE indicator will blink.



4. Connect the S/PDIF device to the S/PDIF IN jack.

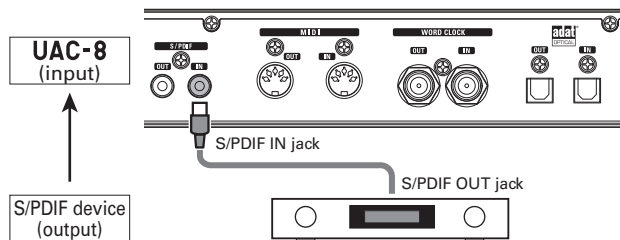


5. The S/PDIF CLOCK SOURCE indicator will light, confirming synchronization.




► Outputting a S/PDIF signal from the UAC-8

3. Use **UAC-8 MixEfx** to set CLOCK SOURCE to INTERNAL.

The INTERNAL CLOCK SOURCE indicator will blink.



4. Connect the S/PDIF device to the S/PDIF OUT jack.

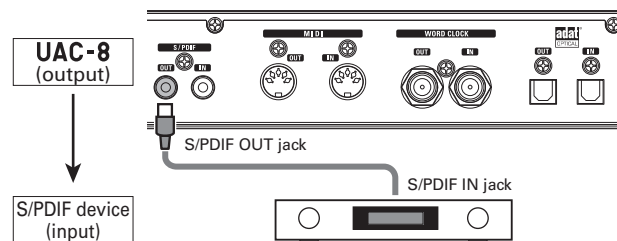

NOTE

- To synchronize audio clock, the **UAC-8** and the connected device must have the same sampling rate settings.
- When using an S/PDIF device with a word clock function, you can connect the **UAC-8** WORD CLOCK OUT connector to the S/PDIF device word clock input connector and synchronize them. (→P.20)
- If CLOCK SOURCE is set to S/PDIF, but synchronization with an S/PDIF device is not possible, the CLOCK SOURCE indicator will blink. In this case, the **UAC-8** will operate using its internal clock.

Using Digital Audio Equipment (continued)

■ Connecting ADAT Optical Devices

1. Minimize the volume of output devices connected to the **UAC-8**.

HINT

When connected, noise might occur until clock synchronizes.

2. Set the same sampling rates for the **UAC-8** and the connected device.

NOTE

For instructions about how to change the sampling rate of the **UAC-8**, see the **UAC-8 MixEfx** Reference Guide.


► Inputting an ADAT optical signal to the **UAC-8**

3. Use **UAC-8 MixEfx** to set **CLOCK SOURCE** to **ADAT**.

The ADAT **CLOCK SOURCE** indicator will blink.



4. Connect the ADAT optical device to the ADAT OPTICAL IN jack.

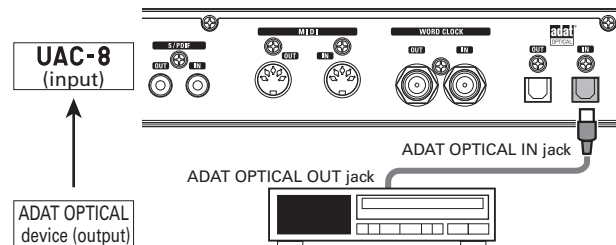


5. The ADAT **CLOCK SOURCE** indicator will light, confirming synchronization.




► Outputting an ADAT Optical signal from the UAC-8

3. Use **UAC-8 MixEfx** to set **CLOCK SOURCE** to **INTERNAL**.

The **INTERNAL CLOCK SOURCE** indicator will blink.



4. Connect the ADAT Optical device to the ADAT OPTICAL OUT jack.

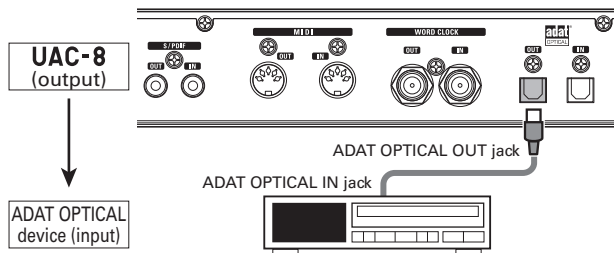

NOTE

- To synchronize audio clock, the **UAC-8** and the connected device must have the same sampling rate settings.
- When using an ADAT Optical device with a word clock function, you can connect the **UAC-8** **WORD CLOCK OUT** connector to the ADAT Optical device word clock input connector and synchronize them. (→P.20)
- If **CLOCK SOURCE** is set to **ADAT**, but synchronization with an ADAT Optical device is not possible, the **CLOCK SOURCE** indicator will blink. In this case, the **UAC-8** will operate using its internal clock.

Using Digital Audio Equipment (continued)

■ Connecting the WORD CLOCK Connectors

Use the WORD CLOCK connectors when you want to synchronize with a master clock generator, for example.

1. Minimize the volume of output devices connected to the **UAC-8**.

HINT

When connected, noise might occur until clock synchronizes.

2. Set the same sampling rates for the **UAC-8** and the connected device.

NOTE

For instructions about how to change the sampling rate of the **UAC-8**, see the **UAC-8 MixEfx** Reference Guide.


► Using the connected device as the master clock

3. Use **UAC-8 MixEfx** to set CLOCK SOURCE to WORD CLOCK.

The WORD CLOCK CLOCK SOURCE indicator will blink.



4. Connect the other device to the WORD CLOCK IN connector.

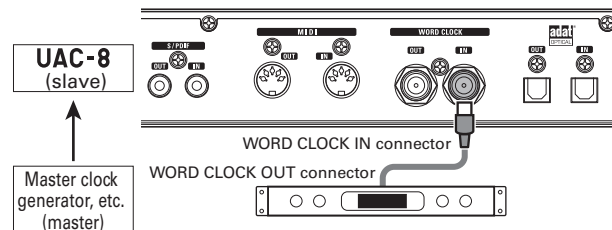

5. The WORD CLOCK CLOCK SOURCE indicator will light, confirming synchronization.



► Using the UAC-8 as the master clock

3. Use **UAC-8 MixEfx** to set **CLOCK SOURCE** to **INTERNAL**.


The **INTERNAL CLOCK SOURCE** indicator will blink.



NOTE

- To synchronize audio clock, the **UAC-8** and the connected device must have the same sampling rate settings.
- If **CLOCK SOURCE** is set to **WORD CLOCK**, but synchronization with the connected device is not possible, the **CLOCK SOURCE** indicator will blink. In this case, the **UAC-8** will operate using its internal clock.


4. Connect the other device to the **WORD CLOCK OUT** connector.

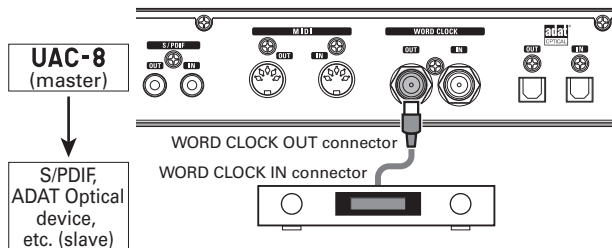

Using Digital Audio Equipment (continued)

■ Connecting MIDI Devices

1. Use MIDI cables to connect MIDI devices to the MIDI IN and OUT jacks.

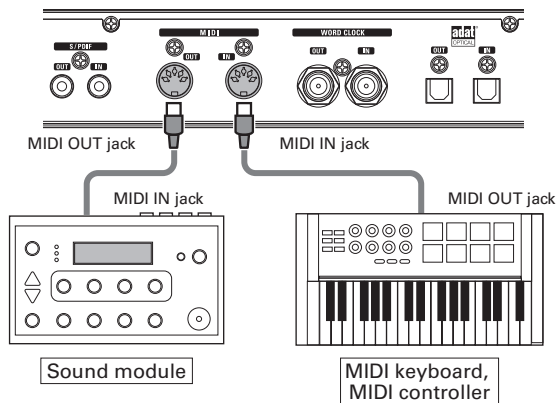

NOTE

When using a MIDI port with a DAW, for example, follow the instructions below when making settings.

The **UAC-8** or **UAC-8 MixEfx** might not function properly otherwise.

<Windows>

Use [ZOOM UAC-8 MIDI]. Do not use [MIDI IN/OUT 2 (ZOOM UAC-8 MIDI)].


<Mac>

Use [ZOOM UAC-8 MIDI I/O Port]. Do not use [ZOOM UAC-8 Reserved Port].


Restoring Factory Default Settings

Follow these instructions to initialize settings, restoring them to the factory defaults.

1. Plug the AD-19 adapter designed for this unit into an outlet.



2. While pressing INPUT 1 , turn  ON.

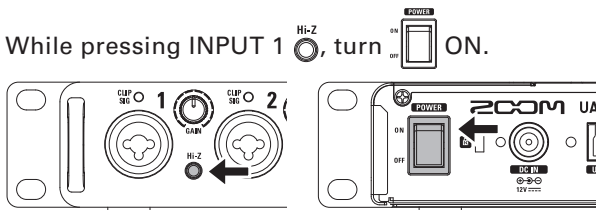


The INPUT 1  and power indicators will blink.

3. Initialize the settings.

Execute: Press INPUT 1 .

Cancel: Press INPUT 2  or .

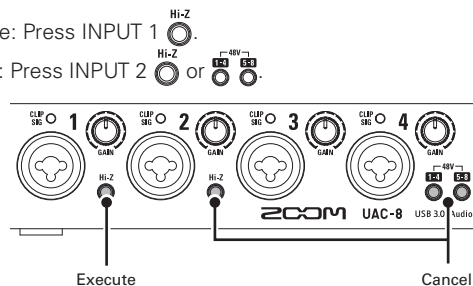

Troubleshooting

If you think that the **UAC-8** is operating strangely, check the following items first.

Cannot select or use the **UAC-8** device

- Confirm that the **UAC-8** is connected to the computer correctly.
- Confirm that the **UAC-8** CLASS COMPLIANT MODE switch is set to OFF.
- Quit all the software that is using the **UAC-8**, and use the POWER switch to turn the **UAC-8** off and on again.
- Reinstall the driver.
- Connect the **UAC-8** directly to a USB port on the computer. Do not connect it to a USB hub.

Cannot use with an iPad

- Turn the **UAC-8** power off, and set the CLASS COMPLIANT MODE switch to ON. Then, turn the power on again.

Playback sound cannot be heard or is quiet

- Check the speaker connections and volume settings on the speakers.
- Adjust the **UAC-8** MAIN OUTPUT and/or PHONES 1/2 volume.
- Use **UAC-8 MixEfx** to check the built-in mixer settings.
- Confirm that the Sound setting of the computer that you are using is set to "ZOOM UAC-8".

Recorded audio is too loud, too quiet or silent

- Adjust the **UAC-8** input gain levels
- When using a condenser mic, turn phantom power on.
- Confirm that the Sound setting of the computer that you are using is set to "ZOOM UAC-8".

The sound of the device connected to the input jack is distorted

- Confirm that the level indicators are not lighting red. If they are lighting red, lower the input levels.

Sound skips during playback or recording

- If you can adjust the audio buffer size of the software that you are using, increase the buffer size.
- Turn the automatic sleep function and other computer power saving settings OFF.
- Connect the **UAC-8** directly to a USB port on the computer. Do not connect it to a USB hub.

Cannot play or record

- Confirm that the Sound setting of the computer that you are using is set to "ZOOM UAC-8".
- Confirm that **UAC-8** is set for input and output in the software that you are using.
- Confirm that the **UAC-8** is connected to the computer correctly.
- Quit all the software that is using the **UAC-8**, and disconnect and reconnect the USB cable connected to the **UAC-8**.

Sound skips during digital input or output

- Confirm that the device used for audio clock synchronization is connected correctly.
- If the **UAC-8** is the master, confirm that audio clock is synchronized on the connected device.
- If the **UAC-8** is the slave, use **UAC-8 MixEfx** to confirm that the CLOCK SOURCE is set to the connection used for audio clock synchronization.
- If the **UAC-8** is the slave, confirm that the CLOCK SOURCE indicator is not blinking.

Specifications

| | | | | |
|---------------------------|-------------------------------------|--------------------------------|--|---------------|
| ANALOG INPUT | INPUT 1–8 | Connectors | XLR/TRS combo jacks (XLR: 2 hot, TRS: TIP hot) | |
| | | Input gain | 0–60 dB (1 dB steps) | |
| | | Input impedance | 5 kΩ 1 MΩ (When IN1/IN2 Hi-Z on) | |
| | | Maximum input level | +13 dBu (XLR at 0 dBFS) +21 dBu (TRS at 0 dBFS) | |
| | | Phantom power | +48 V | |
| ANALOG OUTPUT | MASTER OUTPUT L/R LINE OUTPUT1-8 | Connectors | TRS jacks (balanced) | |
| | | Maximum output level | +14 dBu (at 0 dBFS) | |
| | | Output impedance | 150 Ω | |
| | PHONES 1/2 | Connectors | Standard stereo phone jacks | |
| | | Maximum output level | 20 mW × 2 (into 32 Ω load) +10 dBu | |
| Output impedance | | 33 Ω | | |
| DIGITAL IN/OUT | ADAT OPTICAL | Connectors | ADAT lightpipe | |
| | | | 8 IN/OUT: 44.1 kHz/48 kHz 4 IN/OUT: 88.2kHz/96kHz S/MUX compatible 2 IN/OUT: 176.4kHz/192kHz S/MUX4 compatible | |
| | | S/PDIF | Connectors | RCA (coaxial) |
| | | Supported sampling frequencies | 44.1/48/88.2/96/176.4/192 kHz | |
| | WORD CLOCK | Connectors | BNC | |
| | | Supported sampling frequencies | 44.1/48/88.2/96/176.4/192 kHz | |
| | | Output impedance | 75 Ω | |
| Frequency characteristics | | | 44.1 kHz: –1.0 dB, 20 Hz–20 kHz 96 kHz: –1.0 dB, 20 Hz–40 kHz 192 kHz: –1.0 dB, 20 Hz–60 kHz | |
| Input conversion noise | | | Measured EIN: 125 dB (IHF-A) at 60dB, 150Ω input | |
| Dynamic range | | | AD: 120 dB typical (IHF-A) DA: 120 dB typical (IHF-A) | |

Specifications (continued)

| | | |
|---|-------------------------------------|--|
| Number of recording and playback channels | Audio interface/ standalone mode | Recording: 18 channels (ANALOG: 8, S/PDIF: 2, ADAT Optical: 8) Playback: 20 channels (ANALOG: 10, S/PDIF: 2, ADAT OPTICAL: 8) at 44.1 kHz and 48 kHz |
| | | Recording: 14 channels (ANALOG: 8, S/PDIF: 2, ADAT Optical: 4) Playback: 16 channels (ANALOG: 10, S/PDIF: 2, ADAT OPTICAL: 4) at 88.2 kHz and 96 kHz |
| | | Recording: 12 channels (ANALOG: 8, S/PDIF: 2, ADAT Optical: 2) Playback: 14 channels (ANALOG: 10, S/PDIF: 2, ADAT OPTICAL: 2) at 176.4 kHz and 192 kHz |
| | CLASS COMPLIANT mode | Recording: 8 channels (ANALOG: 8) Playback: 10 channels (ANALOG: 10) at 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz and 192kHz |
| Sampling frequencies | | 192 kHz, 176.4 kHz, 96 kHz, 88.2 kHz, 48 kHz, 44.1 kHz |
| Bit depth | | 24-bit |
| Interface | | USB3.0 / 2.0 |
| MIDI IN/OUT | | 5-pin DIN jacks |
| Power supply | | AD-19 DC12V 2A AC adapter |
| External dimensions | | 157.65 mm (D) × 482.6 mm (W) × 46.03 mm (H) |
| Weight (main unit only) | | 2.02 kg |

Note: 0 dBu = 0.775 Vrms

FCC regulation warning (for U.S.A.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

For EU Countries



Declaration of Conformity

zoom®

ZOOM CORPORATION

4-4-3 Kanda-Surugadai, Chiyoda-ku, Tokyo 101-0062 Japan

<http://www.zoom.co.jp>